



HH020

Payload 20 Kg


Installation method		Application	
Floor	●	Spot welding	●
Ceiling	●	Arc welding	●
Wall surface	●	Handling	●
		Assembly	●
		Sealing	●
		Painting	●

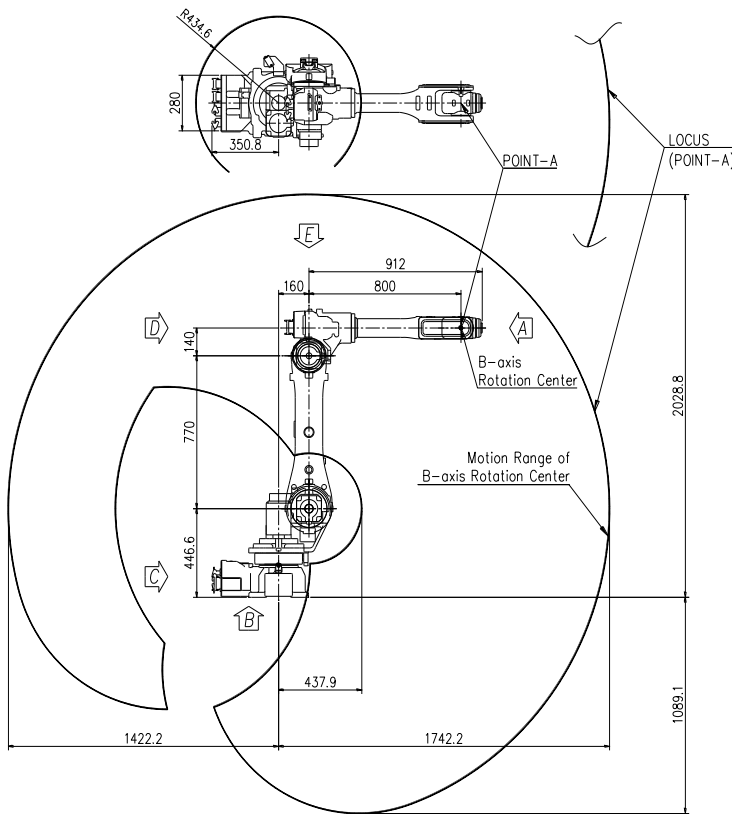

View A: Detailed drawing of the wrist attachment part

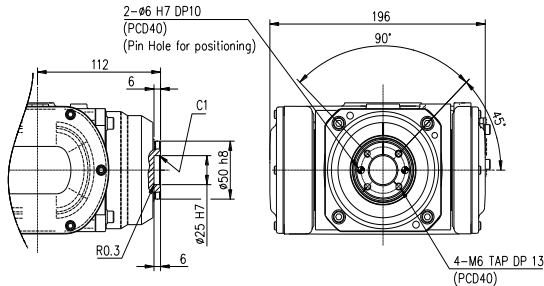


View B: Dimensional drawing for the floor installation of the body

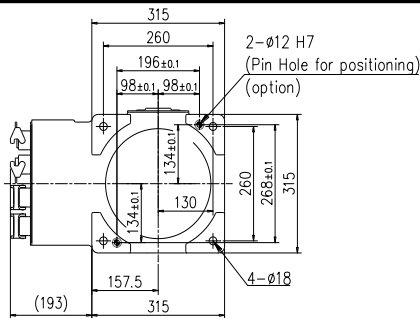


View C: Application cable connection part (Option)

View D: Application cable connection part (Option)

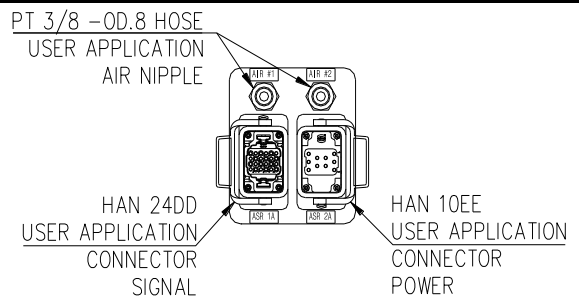


View E: Details of the application ancillary part attachment

Wrist-axis torque line diagram

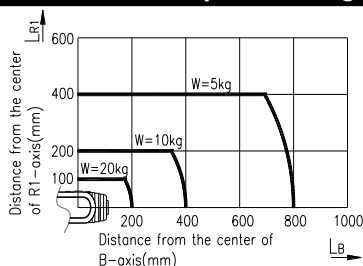


** For product improvement, some of the ratings, specifications, dimensions, etc. are subject to changes without notice.

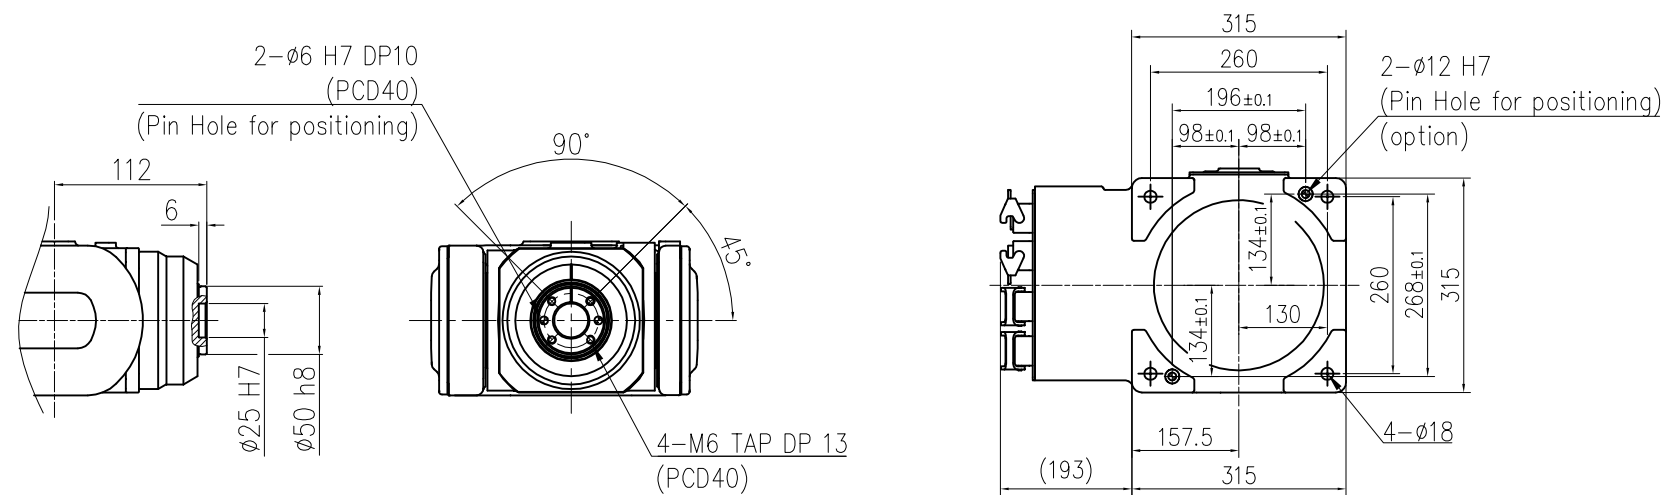


VIEW "A"
(SCALE : 4/1)




VIEW "B"
(SCALE : 2/1)

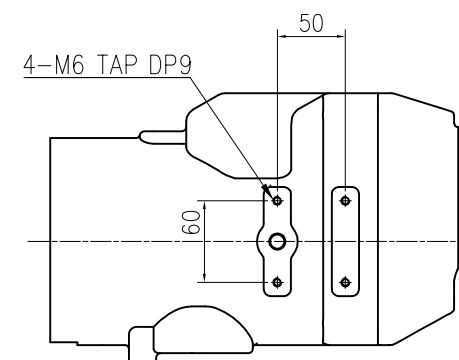

VIEW "E"
(SCALE : 4/1)

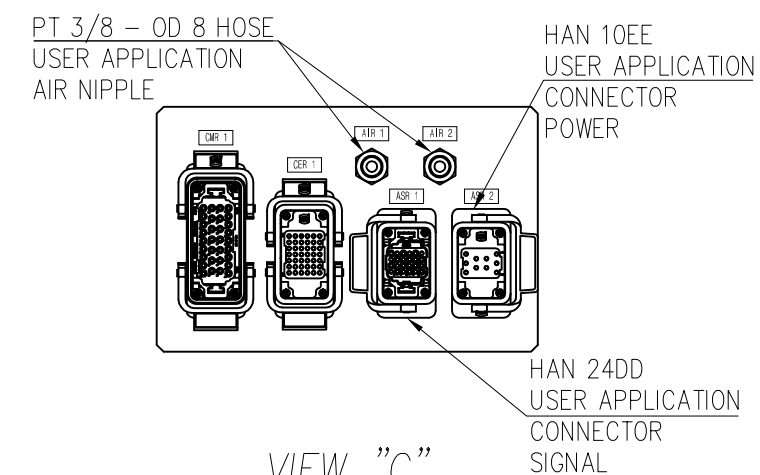

VIEW "C"
(SCALE : 4/1)

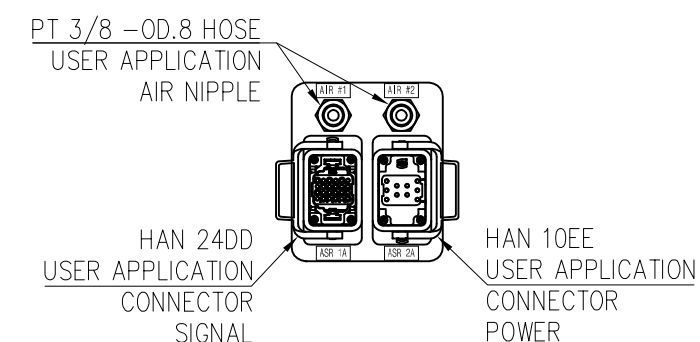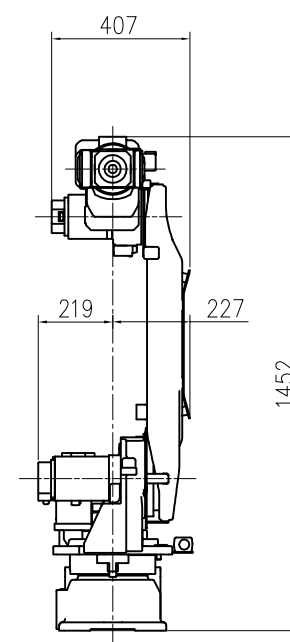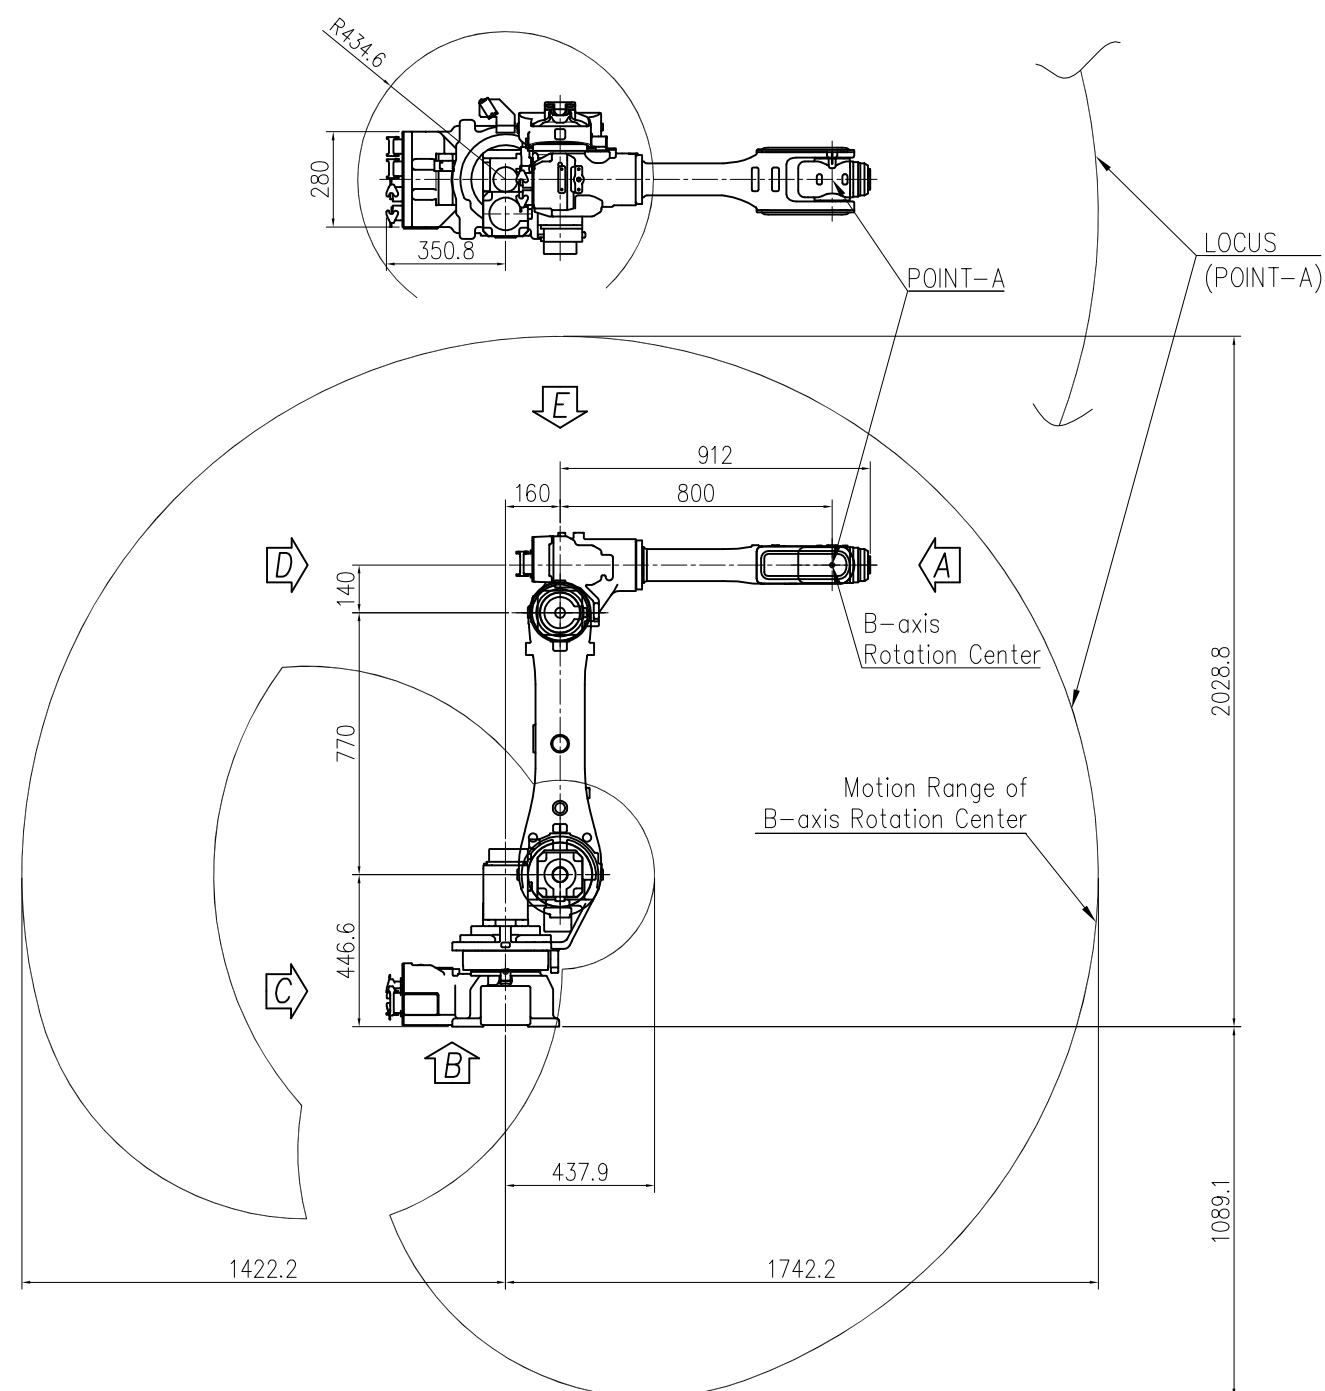

VIEW "D"
(SCALE : 4/1)

TECHNICAL SPECIFICATION SUBJECT TO
CHANGE WITHOUT NOTICE

MODEL	HH020	issue.0
DATE	2018.06.19	
 HYUNDAI ROBOTICS		